

Multi-Purpose Arch™



Multi-Purpose Arch™

Optimize your application power and coverage with Belanger's unique dual directional Multi-Purpose Arch. Designed to be the most flexible functioning arch in the industry, the Multi-Purpose Arch requires minimal tunnel space and is ideal for high, medium, and low-pressure applications. Simply place the Multi-Purpose Arch anywhere in your wash tunnel for virtually any pre-soak, rinse, wash, or wax application.

The Multi-Purpose Arch's industry distinctive design consists of 2 rows of 12 nozzles that are uniquely positioned at opposite 25 degree angles from centerline. This innovative angled delivery provides superior coverage into even the hardest to reach areas on any vehicle including mirrors and vehicle trim. The Multi-Purpose Arch™ is constructed of the highest quality stainless piping and nozzles. You simply choose the pre-soak, rinse, spot free, or wax nozzle kit that fits your application need and the Multi-Purpose Arch will provide thorough consistent coverage each and every time. All arch nozzle fittings are approved to operate high pressure up to 1000 psi, and are ideal for RO water and all industry approved acid and alkaline applications.

Unlike similar arches available on the market today, the Multi-Purpose Arch requires no moving parts to achieve its powerful application coverage, and less moving parts means less maintenance and repair costs. The Multi-Purpose Arch™ also has a unique marketing appeal, which replaces the industrial look of welded and bolted metal with a soft rounded and colorful look. As with all Belanger arch components, the Multi-Purpose Arch™ is available with blue or red colored protective 4 3/8" OD foam covering to compliment your car wash's branding image.

Belanger — Building Lifetime Customers!



Belanger Incorporated Products Specification Sheet



Belanger, Inc. reserves the right to revise specifications, features or designs, and to change or discontinue models at any time without notice or obligation.

BE0029

Copyright 2005
Belanger, Inc.



Specifications

Multi-Purpose™

REQUIREMENTS

Physical

Tunnel Space Required	8"
Unit Height	99"
Unit Width	144"


Utility

Electrical	110 VAC (if optional solenoid valve)
Water	3/4" Barbed Hose Fitting (included)

OUTPUT

Physical

Vehicle Clearance Height	85"
Vehicle Clearance Width	123"

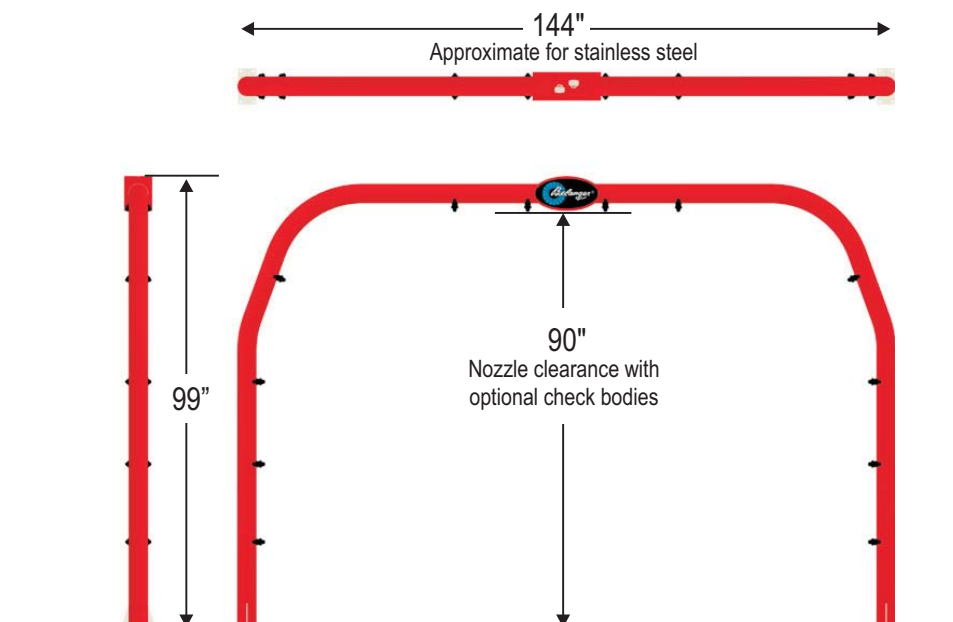

Shown with optional fittings.

