

# Rain Arch™



## Rain Arch™

The Rain Arch is a multi-solution arch that provides unique free falling, rain shower like delivery for virtually any application in your wash. Select your desired water, wax, RO, or drying agent then select the rain shower intensity that you would like it applied with. The Rain Arch is a welcomed addition to any wash tunnel because of its performance flexibility, unique rain shower delivery, economical price point, and minimal space requirement.

Unlike traditional Arch's with nozzles that may spray too much mist in a wash's finishing area, the Rain Arch eliminates this concern with its nozzle-less free falling delivery that minimizes mist and vehicle over spray. Depending on your needs, the Rain Arch can be customized to provide you with just the right amount of application power you require. Choose from the single 100-hole option that delivers between 2-6 GPM, the double 200-hole that delivers 5-10 GPM, or the triple 300-hole configuration that delivers 10-20 GPM. All Rain Arch manifold holes are precision laser cut for optimum solution delivery.

The Rain Arch defines all around flexibility in tunnel configurations with space restraints. Simply mount the Rain Arch manifold anywhere in your wash tunnel for reliable performance. The Rain Arch manifolds may be mounted to an existing 4x4 aluminum arches, a Belanger UniArch, or it can be ceiling mounted. If you don't have an existing arch available for mounting the Rain Arch, Belanger also offers an auxiliary 4x4 square aluminum arch for additional mounting options. A maximum of two manifolds may be mounted on a UniArch.



### Belanger Incorporated Product Specification Sheet



Belanger, Inc. reserves the right to revise specifications, features or designs, and to change or discontinue models at any time without notice or obligation. Prices subject to change without notice.

BE 0026

Copyright 2005  
Belanger, Inc.



# Specifications

## Rain Arch™



### REQUIREMENTS

#### Physical

Vehicle Height Clearance 90" (when using a Belanger mounting option)

#### Utility

Water 3/4" NPT feed required (per manifold)

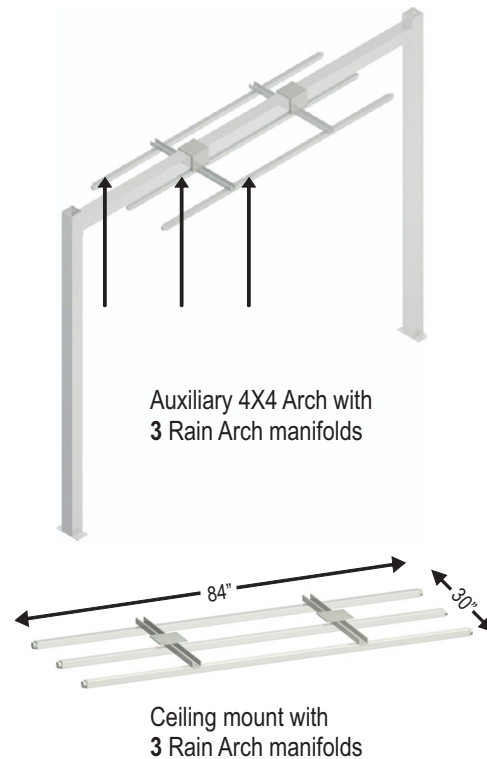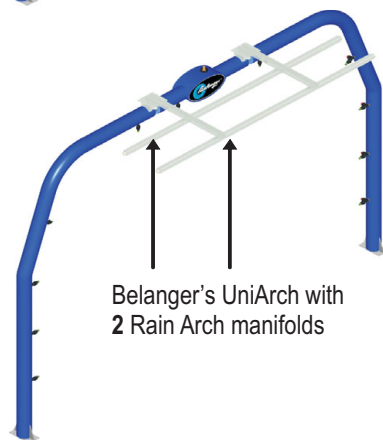

\*A maximum of two manifolds may be mounted on a UniArch. A maximum of three manifolds may be ceiling mounted or mounted on a 4x4 aluminum arch.