


Wind Door™

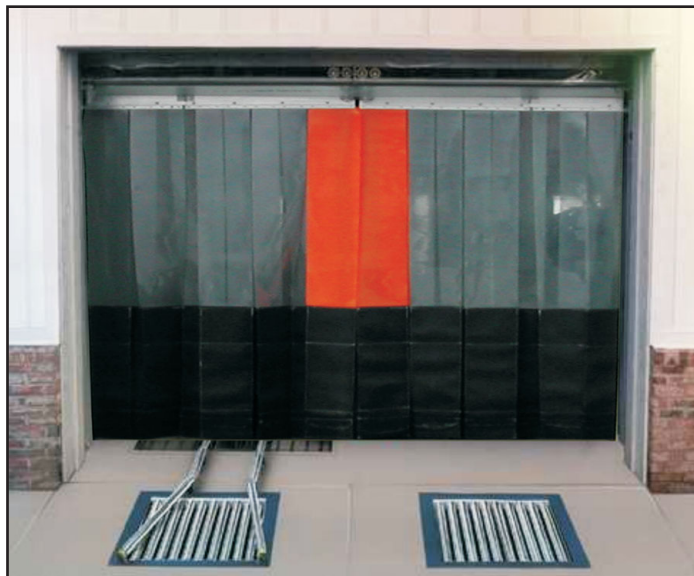

Wind Door™

Your car wash tunnel is the perfect environment for washing cars. To protect that environment regardless of outside conditions, Belanger offers the Wind Door™.

Its heavy-gauge vinyl flaps form a weather-tight seal to protect your bay against the elements. During cold weather, this helps keep warm air in, preventing equipment freeze-ups and costly potential downtime.

In warmer weather, the vinyl can be removed, or left in place to prevent the 'wind tunnel effect' that can double wind speeds in your tunnel. The Wind Door™ combats this, eliminating overspray issues and keeping damaging, unsightly debris out of your bay.

Built for reliable, year-round performance, the Wind Door™ features an aircraft-grade aluminum frame, zero-maintenance UHMW rollers, and a leaded cloth hem that keeps the panels closed until *you* want them open.

And when it's time to open or close, the Wind Door™ completes the action in a matter of seconds, maintaining a smooth traffic flow. To provide the most installation options, the Wind Door™ may be activated by a limit switch, photo eyes or controller tie-in.



Belanger Incorporated Products Specification Sheet



Belanger, Inc. reserves the right to revise specifications, features or designs, and to change or discontinue models at any time without notice or obligation. Prices subject to change without notice.

BE 0059

Copyright 2009
Belanger, Inc.



Specifications

Wind Door™

REQUIREMENTS

Physical

Vehicle clearance height	90" (228.6 cm)
Tunnel space required	36" (.9 meters)
Unit height	106" (2.7 meters)
Unit width	152" (3.9meters)

Utility

Electrical	110 VAC
Hydraulic	n/a
Pneumatic	.3 CFM @ 90 PSI (6.2 BAR)
Water	n/a

